






1-1/4" (31.75mm)

(3mm)


RøHS

Compliant

#### **Faceplate Options**



### Strike Dimensions & Compatible Locksets

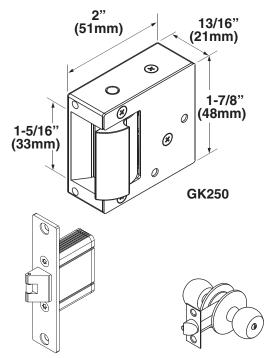

GEM LS-2200 Door Latch

Cylindrical Lockset

# Electric Strikes **GK250** Durable Strikes for Gates or Semi-Outdoor Applications

The GK250 series electric strike is designed for use with cylindrical locksets. It is reversible for right or left handed doors and ideal for gates or semi-outdoor applications. Available with 2 faceplate options.

## **Standard Features**

- Non-handed fully reversible
- For inswing doors
- Works with bored cylindrical locksets or GEM LS-2200 door latch
- Available with ANSI size faceplate option


# Specifications


- Temperature: -10° to +49°C (+14° to +120°F)
- Humidity: 0% to 85% Non-Condensing
- Keeper Width: 1 5/16"(33mm)
- Latch Throw: Max. 1/2" (13 mm)
- Static Strength: 550 lbs (227Kg)
- Endurance Rating: 250, 000 cycles
- Material: Zinc alloy construction
- Finish: Brushed stainless steel (US32D)
- Weight: 270g (9.5 oz)

### Models

Part Number	Descriptions
GK250-12	12 VAC/DC, Fail-secure, P-FP-GK250 faceplate
GK250-12-US	12 VAC/DC, Fail-secure, P-FP-GK251-US faceplate
GK255-12	12 VAC/DC, Fail-safe, P-FP-GK250 faceplate
GK255-12-US	12 VDC/AC, Fail-safe, P-FP-GK251-US faceplate

# **Frame Applications**





Wood Frame

#### Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 3 years from the date of sale to the original customer. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.