




LZ-GEM-600AU Bracket Special LZ brackets (Surface Mount)



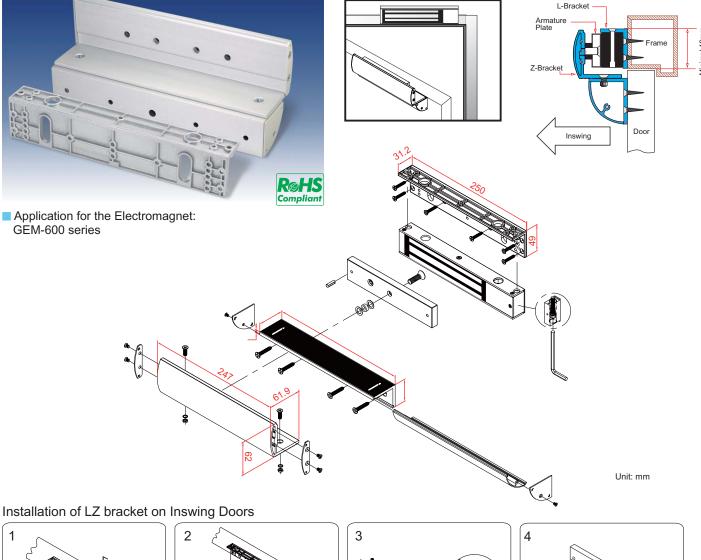





Fasten the electromagent to L bracket with fixing screws.



Assemble Z bracket. Make sure it is still adjustable.




Insert the guide pins into the armature plate.




Fasten the armature plate to \boldsymbol{Z} bracket. Insert the rubber washer between them.


Copyright © Gianni Industries, Inc. All rights reserved. DM-CA-LZ-GEM-600AU Ver.A Published on 2013.05.31



Close the door and turn on the power.



Let the armature plate and electromagnet bond together. Press Z bracket to the door leaf.



Fasten Z bracket to the door leaf.

GIANNI INDUSTRIES, INC.

No.13, Zhongxing Rd., Tucheng Dist., New Taipei City 23678, Taiwan (R.O.C.) Tel: +886-2-2267-7986 / Fax: +886-2-2267-9876 E-mail: inquiry1@gianni.com.tw Website: www.gianni.com.tw