



Application for the Electromagnet: GEM-800 series

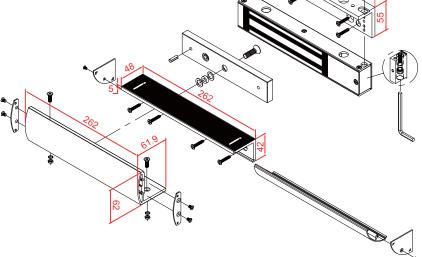


Unit: mm


Installation of LZ bracket on Inswing Doors




Install L bracket on the door frame. Make sure the door may be opened / closed.




Fasten the electromagnet to L bracket with fixing screws.




Assemble Z bracket. Make sure it is still adjustable.




Insert the guide pins into the armature




Fasten the armature plate to Z bracket. Insert the rubber washer between them.



Close the door and turn on the power.



Let the armature plate and electromagnet bond together. Press Z bracket to the door leaf.



Fasten Z bracket to the door leaf.

GIANNI INDUSTRIES, INC.

E-mail: inquiry1@gianni.com. Website: www.gianni.com.tw